



## APPLICATION INFORMATION

# **LIGHT STABILIZATION FOR POLYPROPYLENE AND COMPOUNDS**



## Contents

- 03 The challenge
- 04 The solution
- 05 Excellent long-term stabilization
- 06 High concentration of active ingredients
- 06 Easy to handle
- 06 Conclusion

## The challenge

Polypropylene is commonly used in the automotive industry, construction materials, agricultural films, consumer and recreational goods as well as fibers and textiles. Polypropylene-based articles are subject to property and surface quality degradation when exposed to light over time. Prolonged exposure to light can cause color and gloss change in addition to physical property degradation.


### Note

To ensure the best appearance and full functionality, please open in Adobe Acrobat.

## The solution

BYK-MAX LS 4125 is a pelletized organic UV stabilizer system that can mitigate the property and surface degradation caused by light exposure. This product is a synergistic blend of highly concentrated stabilizers that inhibit the light-induced reactions leading to decomposition of the PP material. BYK-MAX LS 4125 also acts as a radical scavenger and peroxide decomposer. Due to its outstanding UV stability for thick-film PP products, this additive is highly recommended for outdoor applications including deck, patio, and garden furniture, automotive interior and exterior parts, carpets, films, tapes, and more.

Typical applications require between 0.5 %–2.0 % dosage depending on durability requirements and color. BYK-MAX LS 4125 can be added via volumetric or gravimetric dosing units during processing in compounding, tape/film extruders, spinning plants, and injection molding machines. It is suitable for processing temperatures up to 290 °C (554 °F).

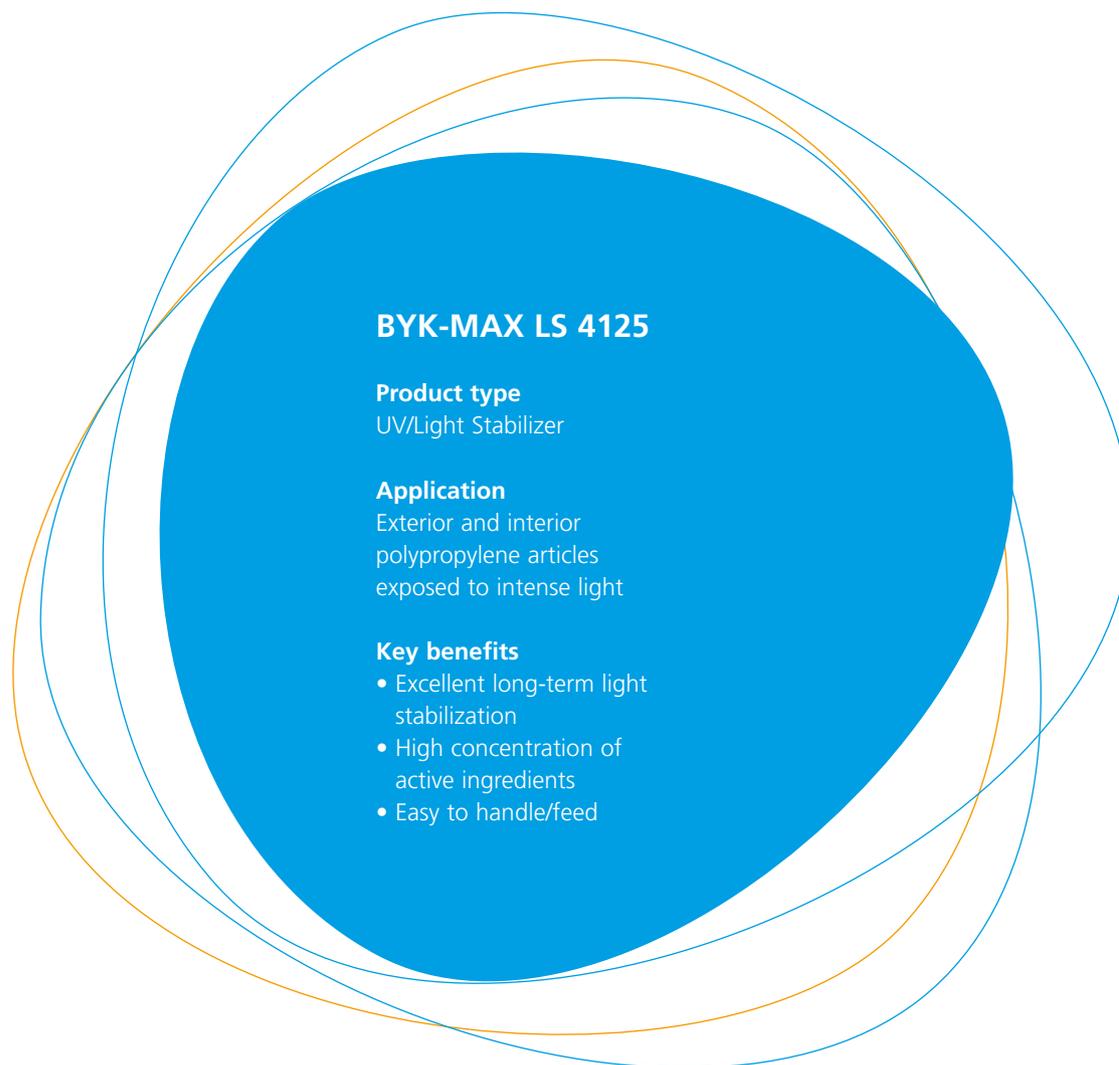


## Excellent long-term stabilization

The combination of stabilization technologies in BYK-MAX LS 4125 work synergistically to provide long-term light stabilization to meet the requirements of both automotive and other markets.

Typical automotive testing requires samples to withstand stimulated outdoor exposure up to 4,000 kJ with color change no greater than a Delta-E of 3.0. Additionally, significant changes in gloss are also not acceptable. When properly applied, BYK-MAX LS 4125 easily meets and exceeds these requirements.


Many non-automotive durable goods markets require weathering in excess of that shown above. BYK-MAX LS 4125 has proven effective in systems requiring exceptionally long-term durability.

### BYK-MAX LS 4125 – Weathering studies 1 % dosage on PP in 30 % GFPP Delta-E/gloss measured using SAE J2527 (Exposure in kJ)

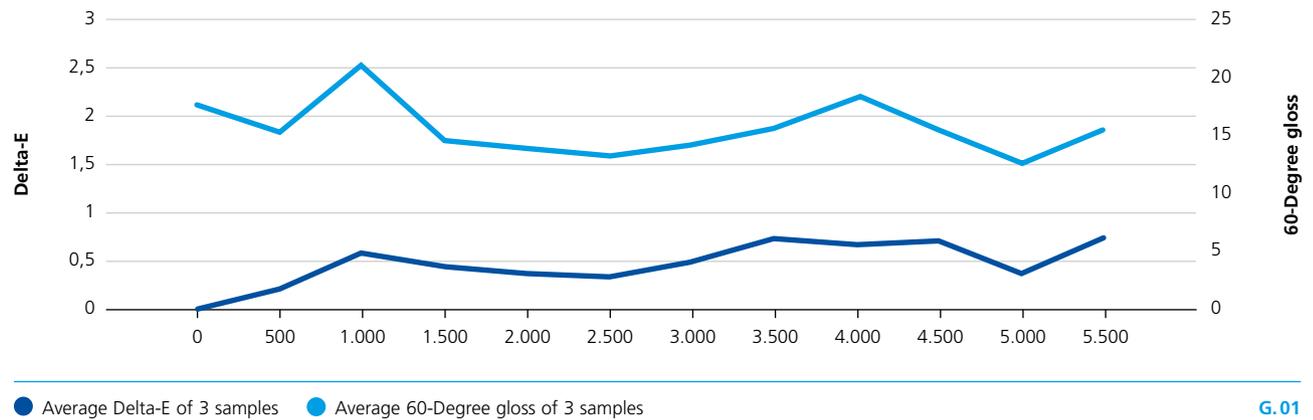

G.01

### BYK-MAX LS 4125 – Weathering studies 2 % dosage on PP in 40 % GFPP Delta-E/gloss measured using SAE J1960 (Exposure in hours)

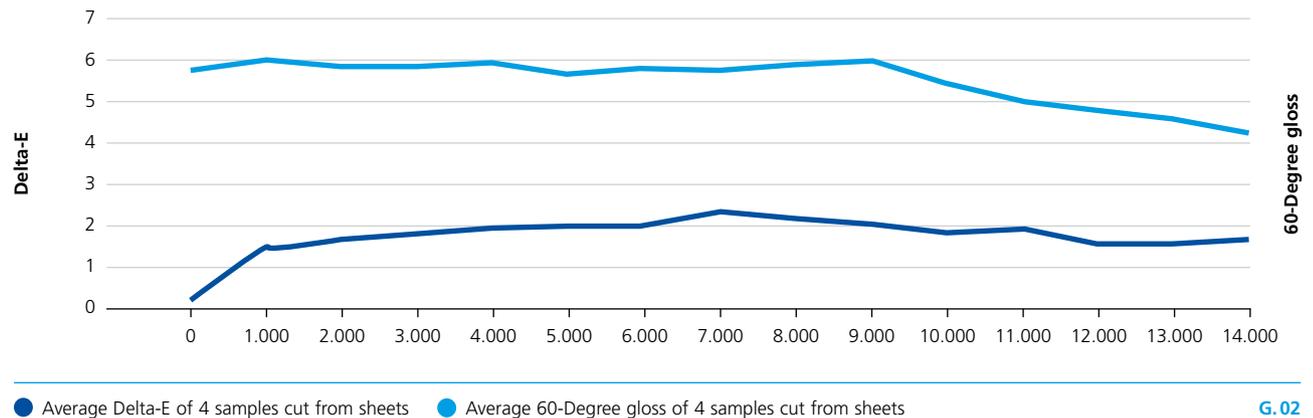

G.02

## High concentration of active ingredients

BYK-MAX LS 4125 has a 50% active ingredient level, minimizing the amount of carrier resin needed. The typical amount of carrier resin required adds unnecessary cost for the customer. Due to the product form of the stabilizers required for this performance, this level of activity is difficult to achieve using standard manufacturing processes. BYK's proprietary processes minimize the use of carrier resin required to produce these concentrates leading to the lowest total cost.

## Easy to handle

Providing easy to use products is key to customer satisfaction. Controlled migration of key active ingredients to the exposed areas of the product is essential to the performance of BYK-MAX LS 4125. While this migration is necessary and desirable in the molded article, the concentration of these low-melting point ingredients in the concentrate would create challenges in customer manufacturing processes were it not for proprietary BYK manufacturing technology. This technology enables the high active ingredient level of BYK-MAX LS 4125 and minimization of total cost to the customer while maintaining free-flowing and easy to handle finished products.

## Conclusion

BYK-MAX LS 4125 is an excellent UV stabilization system for polypropylene-based outdoor articles from furniture to interior and exterior automotive parts. Its high active ingredient level minimizes the amount of carrier resin needed, reducing total cost for the customer.

Due to BYK's proprietary technology, BYK-MAX LS 4125 is a free-flowing, easy to handle product that provides superior long-term performance, minimizing color and gloss change over time.



**BYK-Chemie GmbH**  
 P.O. Box 10 02 45  
 46462 Wesel  
 Germany  
 Tel +49 281 670-0  
 Fax +49 281 65735

[info@byk.com](mailto:info@byk.com)  
[www.byk.com](http://www.byk.com)

ADD-MAX®, ADD-VANCE®, ADJUST®, ADVITROL®, ANTI-TERRA®, AQUACER®, AQUAMAT®, AQUATIX®, BENTOLITE®, BYK®, BYK-DYNWET®, BYK-MAX®, BYK-SILCLEAN®, BYKANOL®, BYKETOL®, BYKJET®, BYKO2BLOCK®, BYKOPLAST®, BYKUMEN®, CARBOBYK®, CERACOL®, CERAFLOUR®, CERAFLOUR®, CERAMAT®, CERATIX®, CLAYTONE®, CLOISITE®, DISPERBYK®, DISPERPLAST®, FULACOLOR®, FULCAT®, GARAMITE®, GELWHITE®, HORDAMER®, LACTIMON®, LAPONITE®, MINERAL COLLOID®, MINERPOL®, NANOBYK®, OPTIBENT®, OPTIFLO®, OPTIGEL®, POLYAD®, PRIEX®, PURE THIX®, RECYCLOBLEND®, RECYCLOBYK®, RECYCLOSSORB®, RECYCLOSTAB®, RHEOBYK®, RHEOCIN®, RHEOTIX®, SCONA®, SILBYK®, TIXOGEL®, VISCOBYK® and Y 25® are registered trademarks of the BYK group.

The information herein is based on our present knowledge and experience. The information merely describes the properties of our products but no guarantee of properties in the legal sense shall be implied. We recommend testing our products as to their suitability for your envisaged purpose prior to use. No warranties of any kind, either express or implied, including warranties of merchantability or fitness for a particular purpose, are made regarding any products mentioned herein and data or information set forth, or that such products, data or information may be used without infringing intellectual property rights of third parties. We reserve the right to make any changes according to technological progress or further developments.

This issue replaces all previous versions.

